

Industrial Grade Hex Flange Captive Screw with Captive Design

Our Product Introduction

Basic Information

- Place of Origin: Guangdong, China
- Brand Name: FineExpress
- Certification: ISO9001|ISO14001| IATF16949
- Model Number: Hex Flange Captive Screw
- Minimum Order Quantity: 30000
- Price: \$0.09/pieces 10000-29999 pieces
- Packaging Details: 1.1000pcs / plastic bag,20kgs/ carton ,then put on the wood pallet ,
2.Carton size:28cm*18cm*13cm,
3.Wood pallet size:118cm*113cm,Weight:700~800Kg
Bulk:0.8 cubic
4.The weight of 20 FT Container:20~25 Tons
5,As your requirements
- Delivery Time: 7~15 Working Day
- Payment Terms: T/T, L/C, D/A, D/P
- Supply Ability: 500000000 Piece/Pieces per Week



Product Specification

- Finish: Custom
- Material: Stainless Steel, Carbon Steel, Alloy Steel
- Standard: Non-standard
- Thread Type: Mechanical Thread
- Package: Small Packing+Carton Packing+Pallet
- Sample: Available Free Within 7 Days
- Heat Treatment: Tempering.Spheroidizing, Quenching, Spheroidizing Annealing Etc
- Grade: 4.8/ 8.8/ 10.9/12.9
- Certificate: IATF16949:2016/ISO9001:2015/ISO14001:2015
- MOQ: 1 Piece In Stock, 30,000 Pcs Customized
- Delivery Time: In Stock 5~7 Working Days, Customized 15~25 Working Days
- Length: 10mm-180mm
- Port: Shenzhen, Guangzhou




More Images



Product Description

Hex Flange Captive Screw

FINEX | Fine and Express FASTENERS

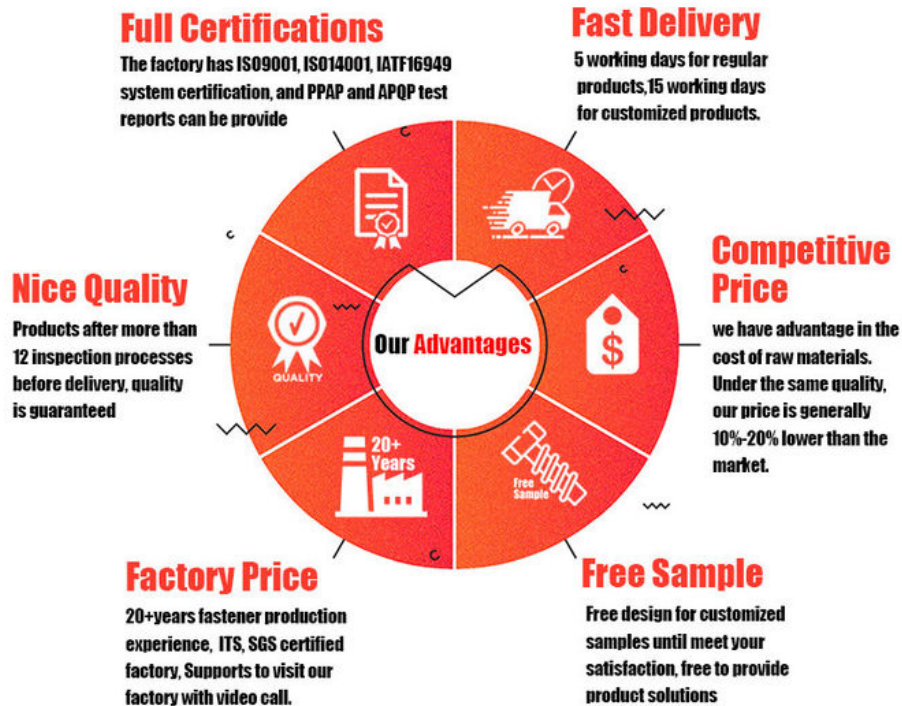

Product Overview

Our Custom Hex Flange Captive Screw is designed for applications requiring secure, reusable fastening with tool-retained convenience. Featuring a hex flange head for torque control and a captive design to prevent loss, this screw is ideal for aerospace, electronics, industrial panels, and medical equipment. Customizable in dimensions, materials, and retention mechanisms, it ensures reliability in high-vibration or frequent-access environments.

Key Features

Captive Design

Tool Retention: Integrated shoulder, retaining ring, or C-clip ensures screw remains attached to the assembly.

No Lost Hardware: Perfect for panels, covers, or doors needing repeated access.

Hex Flange Head

High Torque Transfer: Hex drive (2mm–8mm) for compatibility with standard tools.

Flange Benefits: Eliminates washer use; distributes load to prevent surface damage.

Material Options

Stainless Steel (A2/A4): Corrosion-resistant for marine or outdoor use.

Aluminum (6061-T6): Lightweight with anodized finish options.

Titanium (Grade 2/5): High strength-to-weight ratio for aerospace.

Custom Dimensions

Thread Sizes: M3–M12 metric or UNC/UNF imperial.

Length: 10mm–100mm (standard) or custom lengths.

Flange Diameter: 8mm–25mm (adjustable based on application).

Retention Mechanism

Shoulder Design: Undercut shoulder retains screw in panel hole.

Spring Clip/C-Clip: Snap-on clip for easy installation/removal.

Threaded Collar: Screw threads into a fixed collar for captive action.

Surface Treatments

Coatings: Zinc plating, black oxide, electropolishing, or passivation.

Aesthetic Finishes: Colored anodizing (aluminum) or PVD coatings (black, gold).



Pozi



Phillips



**Anti-theft
Triangle**



Slotted



Hex Socket



Torx



**Torx-internal
Tamber proof pin**



**H type
anti theft**



Tri-wing



**Two-Hole
Tamber proof**



**One way
anti theft**



**Square Slot
Combination**



**Phillips Slot
Combination**



**Slot 6 Lobe
Combination**



**Tri-wing internal
Tamber proof pin**



Blue Zinc



Yellow Zinc



White Zinc



Black Zinc




Nickel Plated



Black Oxide




Anodizing



Dacromet



**Black
Electrophoresis**



Antique Bronze



Green



Baking Finish



What We Produce is Not Just a Screw. We Provide a Guarantee of Secure Fastening




Specification

	More Detail Informations
Available Material	1.Stainless Steel: SS303, SS304, SS316, SS410, SS420; 2.Carbon steel: C1006,C1010,C1018,C1022,C1035K,C1045; 3.Brass: C3602,C3604,Hpb59,Hpb62,Hpb65,Hpb58,Hpb70 ; 4.Aluminum: Al6061, Al6063 etc or as your requirements
Head type	CSK Head,Pan Head,Truss Head,Hexagon Head,Round Head,Oval Head,Button Head,Cap Head,Cheese Head,etc.
Hardness	Carbon Steel:HRC:28~35 ,HV450~700 Alloy Steel:HRC:32~39(grade10.9) HRC:39~44(grade12.9)
Finish	Zinc plated, Nickel plated, Bronze, Copper,Phosphate, Oxidation black, Passivation, Tin, Dacromet, Gold, Chrome, Silver, Phosphorization,Zinc-nickel alloy plated etc.
Sample Available	The sample is free of charge if we have the existing tooling,you only need to pay for the freight cost
Delivery time	Samples time 3-5 working days, Lead time 20-25 working days
Pricing Term	EXW Dongguan(FCA),FOB, CIF, CNF, DDU,etc.
Packing	Bulk in PE bag or Small boxes.then in carton .pallet
Payment term	TT (30% in advance as deposit, balance before delivery) , L/C, Western Union,PayPal etc
Management system	ISO9001:2015
Certificate	ISO,ROHS

Why Choose Us

NO1.Drive compariason



Our screws: cross recess drive remains intact after repeatedly used.

VS



Bad screws on the market: cross recess drive cannot be used after repeatedly used, they may slip or tear out the Philips screw head.

NO2.Torque comparison



Our screws: Nylon patch is high quality, prevailing-torque is more

VS



Bad screws on the market: prevailing-torque is 0 after it is screwed in and out for five times, nylon patch will peel off.

NO3.Screw Plating Comparison



Our screws: good finish, clear thread, even coating, bright appearance.

VS



Bad screws on the market: bad finish, uneven coating, thread is oxidized, the finish is blacked.

NO4.Screw Material Comparison



Our screws: we use quality carbon steel material, Chemical Element content in Steel meets the requirement of ISO standard, they won't be broken after 90° bent, high strength, good toughness.requirement of ISO

VS



Bad screws on the market: bad carbon steel material, Chemical Element content in Steel doesn't meet the requirement of ISO standard, they will be easily broken after 90° bent, high strength and bad toughness.

NO5.Mechanical Properties comparison



VS



Our self tapping screws: our screws have high strength, enough hardness, good toughness after heat treated, they won't be broken after bent.

Bad screws on the market: they have high strength and bad toughness, thread will easily be broken, because the screws are not tempered.

NO6. Corrosion Resistance Comparison of SUS304



VS



Our SUS304 screws: nickel chemical element content won't be less than 8, meets ISO requirement. The finish won't be oxidized, rusted and has good anti-corrosion capacity. standard, they won't be broken after 90° bent, high strength, good toughness.

SUS304 screws on the market: nickel chemical element content will be less than 8, even doesn't have nickel plated, which doesn't meet ISO requirement. The finish will be oxidized, rusted and lose anti-corrosion capacity.

Company Profile

FINEX

— 20 YEARS
Non-standard Fasteners
Customization Experience

+86-13527934468

alianchen@finexfastener.com

Contact us



Partners and Exhibitions



Raw Material (IQC)



Head Size (IPQC)



Thread Size (IPQC)



Spot check on surface treatment



Image Measuring Instrument



Hardness Test



ROHS Test



Salt Spray Test



Tensile Force Test



Touque Test



Screw Optical Screener



FQC by Manual Selection

FAQ

Q1: What is your main products and material supply?

A1: Our main products are Electronic screws, Sems screws, Tapping screws, Chicago screws, Shoulder screws etc. Special Non-standard studs, Turning parts and High-end precision complex CNC Machining parts etc.

A2: Carbon Steel, Alloy Steel, Aluminum alloy,Stainless Steel, Brass, Copper ,Titanium alloy or according to your requirement.

Q2: When can I get the price?

A: We usually offer you a quotation within 12 hours, and the special offer is not more than 24 hours.Any urgent cases, please contact us directly by phone or send email to us.

Q3: What about the transportation and delivery date?

A: If the weight of goods more than 80kg,Normally we use shipment to transprot the orders. It is about 20-30days . If the weight of goods less than 80kg,or there are urgent, we can send the goods via air express,It is 3~5 days.

Q4: What's your packing?What to do in case of damaged goods during transport?

A1: Our Normal packing is bulking in Cartons, less than 20 kgs/carton, 48 cartons / pallet. We also can pack products according to your requirement.

A2: To avoid any subsequent trouble regarding quality issue, we suggest you check the goods once you receive them. If there is any transport damaged or quality issue, don't forget take the detail pictures and contact us as soon as possible, we will properly handle it to make sure your loss to reduce to the smallest.

Q5: Can I get discounts?

A: Yes, for big order, frequent customers, we give reasonable discounts.

Q6: Do you have enough capacity?

A: Our production equipment is a new imported equipment. We have a group of skilled workers who have been working for more than 10 years. Their production experience is very rich and their skills are very skilled. The screws can be 30 million pcs/month. We have sufficient funds to ensure the normal operation of the factory.



Finexpress Precision Manufacturing (dongguan) Co., Ltd



+86-13527934468



alianchen@finexfastener.com



metalscrewfastener.com

Building 2, No. 129 Xinmalian Xinma Road, Dalang Town, Dongguan, Guangdong, China