Gray Dacromet Coated Hex Nut High Corrosion Resistance M6/M8/M10 for Automotive/Construction/Marine Applications

Basic Information

- Place of Origin:
- Brand Name: FineExpress
 Certification: ISO9001|ISO14001| IATF16949
 Model Number: Gray Dacromet Coated Hex Nut
 Minimum Order Quantity: 30000
- Price: \$0.05/pieces 1000-9999 pieces
 Packaging Details: 1.1000pcs / plastic bag,20kgs/ carton ,then put on the wood pallet , 2.Carton size:28cm*13cm, 3.Wood pallet size:118cm*113cm,Weight:700~800Kg

Bulk:0.8 cubic

5,As your requirements

7~15 Working Day T/T, L/C, D/A, D/P

4. The weight of 20 FT Container: 20~25 Tons

50000000 Piece/Pieces per Week

Guangdong, China

- Delivery Time:
- Payment Terms:
- Supply Ability:

Product Specification

• Finish:	ZINC PLATED, Passivated, Chrome Plated, Nickel Plated, Polished, Custom
 Measurement System: 	Imperial (Inch)
Application:	Heavy Industry, Mining, Water Treatment, Healthcare, Retail Industry, Food & Beverage, General Industry, Oil & Gas, Automotive Industry
• Standard:	DIN
• Size:	M1~M16
 Surface Treatment: 	Nickel Plated, Zinc Plated, Passivation, Etc.
• Grade:	6.8/ 8.8/ 10.9/ 12.9
• Delivery Time:	In Stock 5~7 Working Days, Customized 15~25 Working Days
Service:	OEM Customized Services
• Package:	Small Packing+Carton Packing+Pallet
Certificate:	ISO9001:2015, SGS, RoHs, MTC
	1 Diago In Steak 20 000 Dec Customized



More Images










Product Description

Gray Dacromet Coated Hex Nut - High Corrosion Resistance M6/M8/M10 for Automotive/Construction/Marine Applications

FINEX | Fine and Express FASTENERS 7 @ 7 0

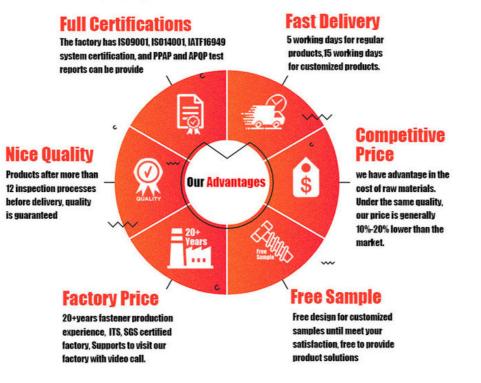

Product Overview

Our Gray Dacromet Coated Hex Nut is engineered for extreme environments where corrosion resistance and durability are paramount. Featuring a Dacromet coating (zinc flake-based), these nuts provide superior protection against saltwater, chemicals, UV exposure, and industrial pollutants. Ideal for automotive underbody components, marine hardware, and structural steel assemblies, they combine ISO-certified performance with a sleek gray finish for seamless integration into demanding applications.

Key Features

Dacromet Coating Technology

Advanced Corrosion Resistance: 1,000+ hours in salt spray tests (ASTM B117), outperforming standard galvanization.

Chromium-Free & Eco-Friendly: RoHS-compliant, non-toxic coating safe for environmental and worker safety.

High-Strength Carbon Steel Core

Grade 8/10: Tensile strength up to 1,000 MPa for heavy-load applications.

Hydrogen Embrittlement-Free: Coating process eliminates risk of brittleness in high-strength steel.

Hex Design for Torque Control

Wrench-Friendly: Full hex profile (ISO 4032) for compatibility with standard sockets and torque tools.

Vibration Resistance: Maintains clamp force in dynamic or high-frequency environments.

Aesthetic & Functional Finish

Matte Gray Appearance: Blends into modern industrial designs while hiding wear.

Temperature Resistance: Stable performance from -50°C to 300°C (-58°F to 572°F).

FINEX | Fine and Express FASTENERS 7 @ 7 C

Click Here To Start Customizing Customizable Hole Shape







Head type	CSK Head,Pan Head,Truss Head,Hexagon Head,Round Head,Oval Head,Button Head,Cap Head,Cheese Head,etc.
Hardness	Carbon Steel:HRC:28~35 ,HV450~700 Alloy Steel:HRC:32~39(grade10.9) HRC:39~44(grade12.9)
Finish	Zinc plated, Nickel plated, Bronze, Copper,Phosphate, Oxidation black, Passivation, Tin, Dacromet, Gold, Chrome, Silver, Phosphorization,Zinc-nickel alloy plated etc.
Sample Available	The sample is free of charge if we have the existing tooling, you only need to pay for the freight cost
Delivery time	Samples time 3-5 working days, Lead time 20-25 working days
Pricing Term	EXW Dongguan(FCA),FOB, CIF, CNF, DDU,etc.
Packing	Bulk in PE bag or Small boxes.then in carton .pallet
Payment term	TT (30% in advance as deposit, balance before delivery) , L/C, Western Union,PayPal etc
Management system	ISO9001:2015
Certificate	ISO,ROHS
Why Choose Us	

NO1.Drive compariason



NO2.Torque comparison

VS



Our screws: Nylon patch is high quality, prevailing-torque is more



Bad screws on the market: prevailing-torque is 0 after it is screwed in and out for five times, nylon patch will peel off.







Partners and Exhibitions 💈 💿 🖥 🔿

















FAQ

Q1: What is your main products and material supply?

A1: Our main products are Electronic screws, Sems screws, Tapping screws, Chicago screws, Shoulder screws etc. Special Non-standard studs, Turning parts and High-end precision complex CNC Machining parts etc.

A2: Carbon Steel, Alloy Steel, Aluminum alloy, Stainless Steel, Brass, Copper, Titanium alloy or according to your requirement.

Q2: When can I get the price?

A: We usually offer you a quotation within 12 hours, and the special offer is not more than 24 hours. Any urgent cases, please contact us directly by phone or send email to us.

Q3: What about the transportation and delivery date?

A: If the weight of goods more than 80kg,Normally we use shipment to transprot the orders. It is about 20-30days . If the weight of goods less than 80kg,or there are urgent, we can send the goods via air express, It is $3 \sim 5$ days.

Q4: What's your packing?What to do in case of damaged goods during transport?

A1: Our Normal packing is bulking in Cartons, less than 20 kgs/carton, 48 cartons / pallet. We also can pack products according to your requirement.

A2: To avoid any subsequent trouble regarding quality issue, we suggest you check the goods once you receive them. If there is any transport damaged or quality issue, don't forget take the detail pictures and contact us as soon as possible, we will properly handle it to make sure your loss to reduce to the smallest.

Q5: Can I get discounts?

A: Yes, for big order, frequent customers, we give reasonable discounts.

Q6: Do you have enough capacity?

A: Our production equipment is a new imported equipment. We have a group of skilled workers who have been working for more than 10 years. Their production experience is very rich and their skills are very skilled. The screws can be 30 million pcs/month. We have sufficient funds to ensure the normal operation of the factory.

